

SARCLERSE



**DOWNLOAD
DOCUMENTATION**



**REQUEST
DEMONSTRATION**



**FIND A
DEALER**



**DOWNLOAD
THE NOTICE**



**PIECE OF
REPLACEMENT**

SPRING HARROW

A MACHINE FOR AN OPTIMAL RESULT !

Folding at 3m to drive with serenity

Standard or scissors folding depending on width (scissors from 9m).

Sarclerse are equipped of double tines adapted to your crops and fixed by R clips for a tine quick change.

The mounting system eliminates play (constant elastic pressure mounting) between the tine tube and the double tine. The clip is held tightly against the tube due to the constant tine pressure, which guarantees that the tines are well held.

Spacing between tines : 25mm.

Compact Ø 7mm tines (L = 430 mm or 530 mm) or Ø 8 mm standard

(L = 530 mm) for a pasture use.

Manual or hydraulic adjustment of the tines aggressiveness.

Available from 1.50m to 12m in mounted version




Hydraulic and mechanic locking safety (transport and work position)



Tine quick change ! Fixation with R clips Manual or hydraulic adjustment of the tines aggressiveness.



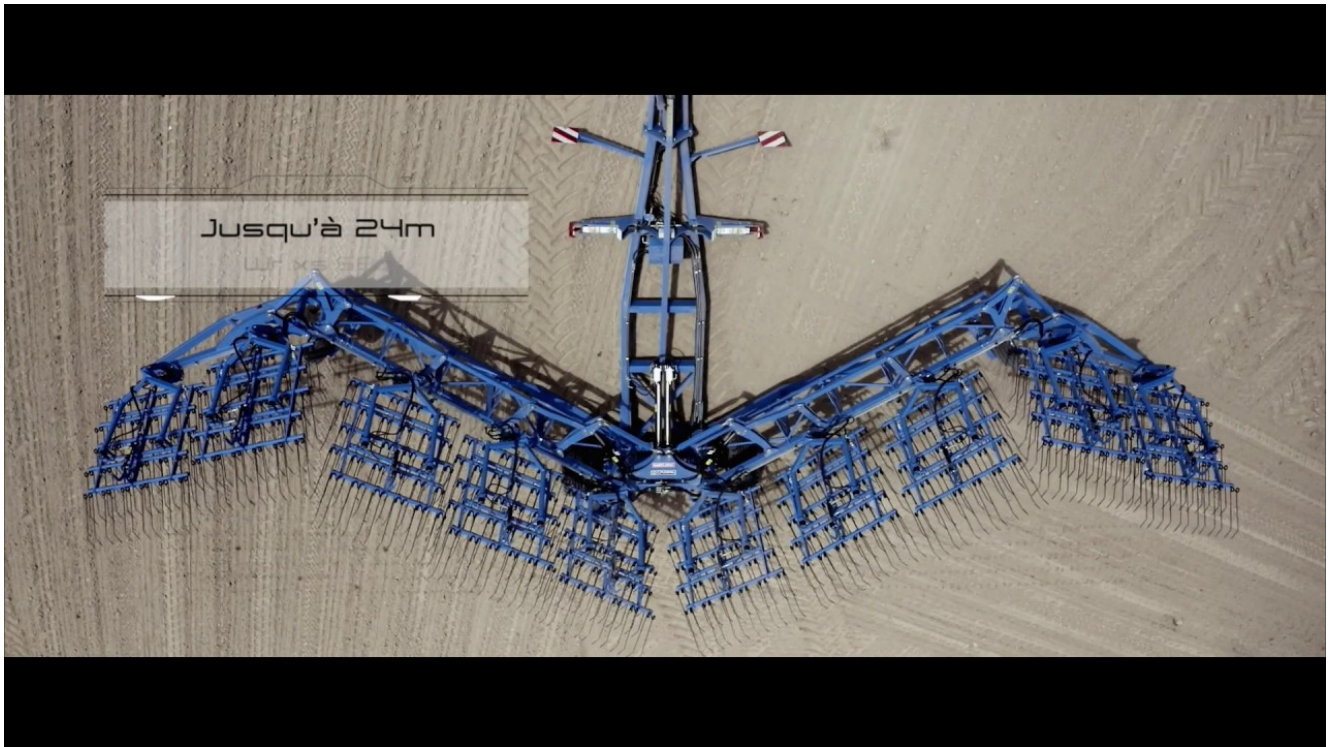

THE FRAME

- 3 point hitch with anti-rotation pin category 2/3
- Welded single piece frame – tube 100×5 mm and 100×8 mm
- Folding articulation with thick polyamide ring.
- Depth control wheels 16×6.50-8 (Ø 410×170mm) up to 7.50m and 18.5×8.50-8 (Ø460×220mm) from 9m
- Folding to 3 m
- Ø 7mm tines length 430 or 530mm or Ø 8mm tines length 530mm
- Road light and signals included

WELL FINISHED WORK

- It is possible to adjust the implement settings both easily, and without tools
- Manual or hydraulic adjustment of the tines

aggressiveness.

TWO TYPES OF FOLDING

From 9 m: scissor folding in order to reduce transport height.



Standard folding



Scissor folding

WIDTH : FROM 1,5 TO 12 M



SEMLOC : RESEED YOUR PASTURES IN THE SAME TIME



Broadcasting seed (on the surface) for grass- land regeneration

200 L hopper Delivered with 2 feeder rollers (small or large grains)

Fan driven by 2 electric motors or a hydraulically driven fan from 9 m wide and upwards.

Seed rates from 2 to 100 kg/ha – rate governor.

The seed rate is altered according to forward speed

Loading platform available

LEVELLING BOARD: MAKE THE MOST OF YOUR PASS-BY LEVELLING YOUR LAND!



Independant notched blades, mounted on square tine (20mm) for rigidity and maximum aggressiveness on surface Fix directly on SARCLERSE CHASSIS



Rapid tine changing!



The mounting system eliminates play (constant elastic pressure mounting) between the tine tube and the double tine. The clip is held tightly against the tube due to the constant tine pressure, which guarantees that the tines are well held.



Ø7mm standard(L=530 mm) stimulate vibrations



Ø7 mm compact(L=430 mm) more rigid – less vibrating



Ø 8mm compact (L=530mm) Efficient moss take off



Manual adjustment



Hydraulic adjustment



TRAILED SARCLERSE

